

5

4

3

2




1

D


C

B

A

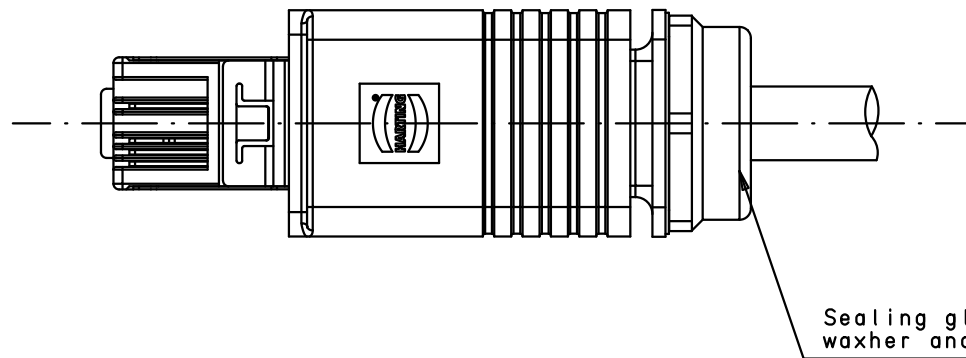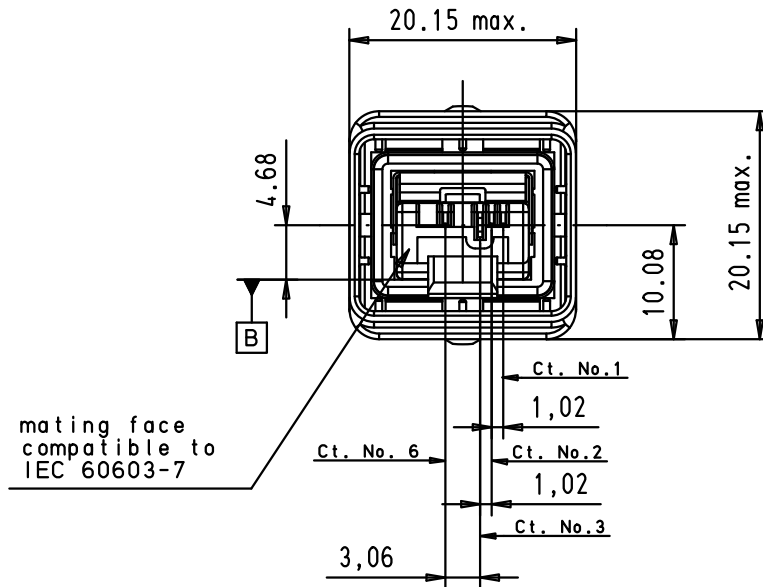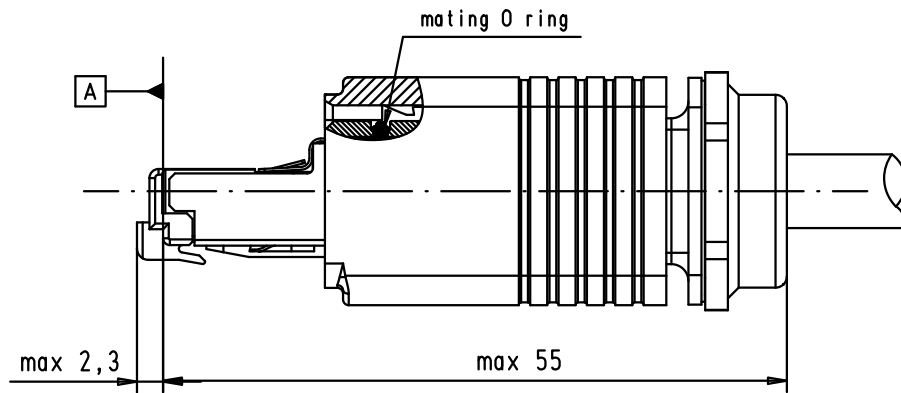

Plug according to 61076-3-106 IEC - variant 04

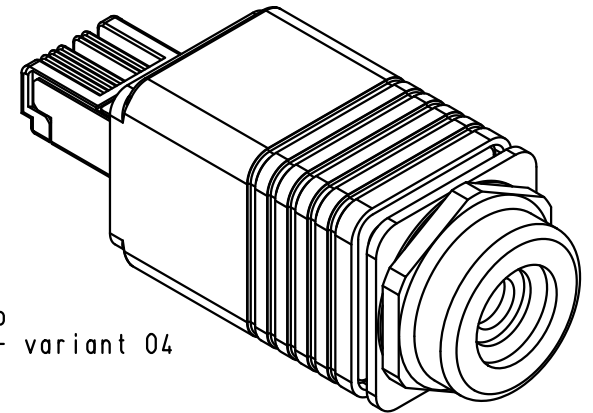

Cable diameter : 6.5 to 7.2 mm
AWG 22 to AWG 23 Solid &
AWG 22 to AWG 24 Stranded
With wires O.D max. 1.6mm.

09 45 145 1100

Au: 1.27 μ m over nickel

Part Number

Data contact plating

			Dat.	Name
			Detail.	10-Oct-02 JFB
			Insp.	
33265	15/11/05	AM	Stand.	
31554	08-Oct-03	JFB		
31394	18-fec-03	PP		
Mod.	Dat.	Name		

HARTING EURL
F-95972 Paris



All Dim. in mm
Orig. Size DIN A 4



RJ-Industrial

Push pull thermoplastic
IP67 shielded Plug with
4 datas contacts

TB 09 45 145 1100

Sub. RP 090182-27-0X

Maßstab/
Scale

1.5:1

Blatt/ Page

1/1