

ET-M8196F

Ethernet Remote Unit with High-speed, DSP-based, 6-axis Motion Control Module



Features:

- Remote control via Modbus TCP
- DSP-based motion control module
- Maximum pulse output frequency: 4 MHz
- Maximum Encoder input frequency: 12 MHz
- Independent 6-axis motion control
- 2- to 6-axis linear/ 2- to 3-axis circular/ helical interpolation function
- Continuous interpolation
- 4-step home mode with auto-searching
- Synchronized start motion
- Programmable T/S-curve acceleration and deceleration
- Software limit protection
- Software FIFO for arbitrary curve motion
- High-speed position latch
- High-speed compare trigger and auto-increment compare mode
- Expandable remote I/O: 128 DI and 128 DO via a two-wire FRnet interface.

4

1

Remote Motion Solutions

Introduction:


The ET-M8196F is a compact remote motion control device which uses Modbus TCP as its communication protocol. The ET-M8196F acts as a server in a Modbus TCP network and supports all standard Modbus function codes defined by the Modbus TCP protocol. Nowadays many PCs have got limited PCI slots; therefore the ET-M8196F can be used to replace PCI motion control cards. The ET-M8196F has got two Ethernet ports which allow daisy chaining.

The motion controller of the ET-M8196F consists of an Ethernet communication module and a 6-axis motion control card. A digital signal processor (DSP) is the brain of the motion controller which calculates the commanded move trajectory and manages supervisory control by monitoring the limits and emergency stops to ensure safe operation. I/O control output (e.g. latch, compare, encoder counter etc.) is realized in a Field Programmable Gate Array (FPGA).

The motion controller is suitable for general-purpose motion control applications. In addition to its wide speed range, this intelligent motion controller also has a variety of built-in motion control functions, such as 2- to 6-axis linear interpolation, 2- or 3-axis circular interpolation, helical interpolation, T/S-curve acceleration/deceleration, and automatic home search, etc.

In addition the ET-M8196F acts as an FRnet master and can control up to 128 digital outputs and 128 digital inputs. FRnet is a two-wire serial bus and has a scan interval of 0.72 ms and it is specifically designed for easy and cost effective wiring. ICPDAS provides a large range of FRnet I/O terminal boards and modules.

An application programming interface (API) for communicating with the ET-M8196F motion controller is being provided. This enables the user's program on the host computer to easily interact with the motion controller. A software utility for Ethernet configuration and basic motion settings and execution is part of the software package.

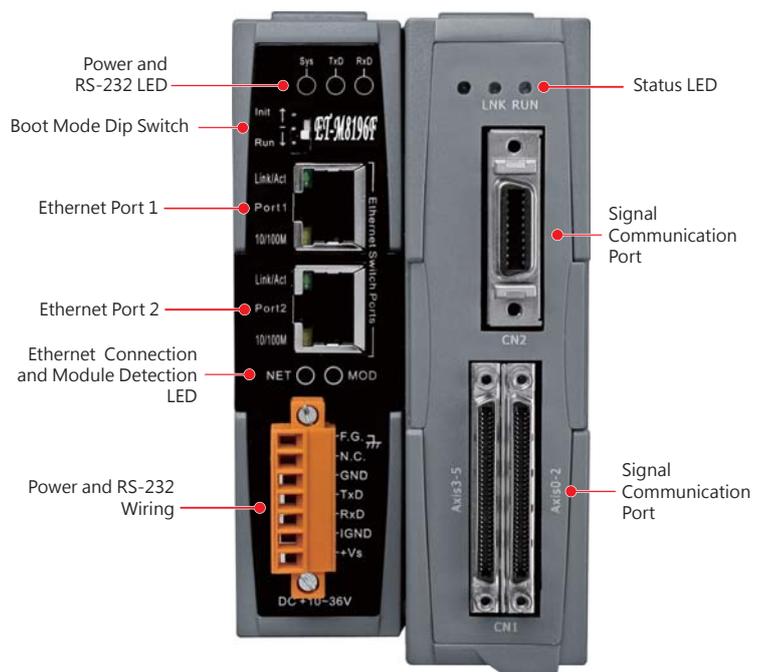

ET-M8196F Interface Functions

Specifications:

Communication Protocol	Modbus TCP Modbus TCP server
Number of Axes	6
Maximum Pulse Output Rate	4 MHz
Command Type	Pulse Command
Pulse Output Mode	CW/CCW, PULSE/DIR, A/B pulse
Linear Interpolation	Any 2- to 6-axis
Circular/Helical Interpolation	Any 2- or 3-axis
Speed Curve Profile	T/S-curve
Mechanical Switch Input	Home, LMT+/-, NHOME, LTC, EMG
Servo I/O Interface	Input: INP, ALM, RDY Output: SVON, ALM_RST, ERC
Ring Counter Mode	32-bit
Position Control Mode	Relative and absolute position
Position Compare Trigger	4 MHz
Encoder Interface	A/B pulse, Up/Down
Encoder Counter	32-bit
Encoder Counting Rate	12 MHz
Digital Input Channels	Local: 12 DI Expandable: 128 DI
Digital Output Channels	Local: 3 DO Expandable: 128 DO
I/O Isolation (with DN-8368)	2500 Vrms optical isolation
Connector	68-pin VHDCI Connector and 20-pin SCSI-II
Power Consumption	+24V
Environmental	
Operating Temperature	0 ~ +60 °C
Storage Temperature	-20 ~ +80 °C
Ambient Relative Humidity	5 ~ 90 % RH, non-condensing

Software Support:

Windows 10 Windows 8 Windows 7 Windows XP	32/64 bit: Visual C++ lib/DLL C#, VB.Net DLL Delphi LabVIEW Visual Basic 6.0 BCB 5.0, 6.0 Configuration utility Demo programs
--	---

Ordering Information/Accessories:

Model No.	Description
ET-M8196F	Ethernet Remote Unit with High-speed, DSP-based, 6-axis Motion Control Module
DN-8368UB	Photo-isolated Universal Snap-on wiring terminal board
DN-8368GB	Photo-isolated General-purpose wiring terminal board
DN-8368MB	Photo-isolated Snap-on wiring terminal board for Mitsubishi MELSERVO-J2 servo amplifier
DN-20M	General purpose digital input and remote digital I/O (FRnet) extension board
CA-MINI68-15	68-pin VHDCI to SCSI-II Connector Cable, Length 1.5 M
CA-SCSI20-M1/M3/M5	20-pin SCSI-II Male connector cable (for Mitsubishi J2 series motor), Length 1 M / 3 M / 5 M.
CA-26-MJ3-15/30/50	26-pin HD D-Sub Male Cable for Mitsubishi Servo Amplifier, 1.5/3/5 M. (for MELSERVO-J3/J4 Series)
CA-26-PA4-15/30/50	26-pin HD D-Sub Male Cable for Panasonic Servo Amplifier, 1.5/3/5 M. (for MINAS A4/A5 Series)
CA-26-YSV-15/30/50	26-pin HD D-Sub Male Cable for Yaskawa Servo Amplifier, 1.5/3/5 M. (for Sigma II/III/V Series)
CA-26-TTA-15/30/50	26-pin HD D-Sub Male Cable for Teco Servo Amplifier, 1.5/3/5 M. (for TSTA-A/A+ Series)
CA-26-DAA2-15/30/50	26-pin HD D-Sub Male Cable for Delta A2 Servo Amplifier, 1.5/3/5 M. (for ASDA-A2 Series)
CA-26-DAB2-15/30/50	26-pin HD D-Sub Male Cable for Delta B2 Servo Amplifier, 1.5/3/5 M. (for ASDA-B2 Series)
CA-26-FFW-15/30/50	26-pin HD D-Sub Male Cable for Fuji Servo Amplifier, 1.5/3/5 M. (for FALDIC-W and ALPHA5 Smart Series)