

D-Subminiature Serial Cable DB25M to DB25F

Model 232AMF5

B+B SMARTWORX

Powered by

ADVANTECH

www.advantech-bb.com



KEY FEATURES

- + Fully molded backshell with strain relief for added protection
- + 26 AWG stranded conductors for flexibility
- + Thumbscrews for tool-less termination
- + Wired straight-through
- + All pins terminated


OVERVIEW

This ready-to-use serial cable features molded connectors and gold plated contacts for superior corrosion resistance to ensure solid connections for the life of the cable. Suitable for connecting 25-pin serial devices to laptops, computers and expansion/interface cards.

ORDERING INFORMATION

MODEL NO.	CONNECTORS	LENGTH	COLOR
232AMF5	DB25 Male to DB25 Female Serial Cable	1.8 m (6 ft.)	Beige

MECHANICAL DRAWING

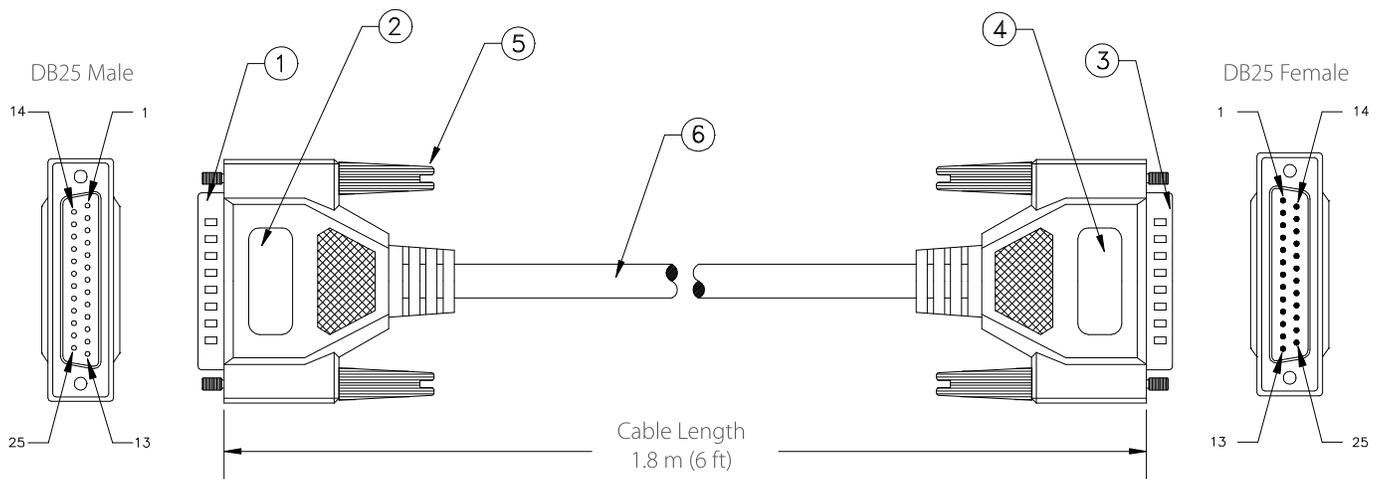

- ① D-subminiature 25-pin male with gold plating contacts
- ② Beige-color molded PVC hood, fully shielded with aluminum foil
- ③ D-subminiature 25-pin female with gold plating contacts
- ④ Beige-color molded PVC hood, fully shielded with aluminum foil
- ⑤ 4/40 molded thumbscrew, beige-color
- ⑥ 28 AWG, 25 conductors + drain wire, single-shielded with aluminum foil, beige-color outer PVC jacket

All product specifications are subject to change without notice.
232AMF_Cable_3917ds