

FPM-3191G

9U Rackmount, 19" SXGA Industrial Monitor with Resistive Touch Control, Direct VGA, and DVI Ports



Introduction

FPM-3191G is a 19" color TFT LCD flat panel monitor specifically designed for industrial applications. With a display size of 19", FPM-3191G provides an adequate display area with sharp and vivid images. The monitor also supports direct VGA signal transmissions, allowing users to upgrade the displays without altering the existing infrastructure. The provision of OSD function keys makes it easy to adjust the onscreen display. Furthermore, the stainless steel chassis and IP65-rated aluminum front panel ensure suitability for industrial applications.

Specifications

General

▪ OSD Controls	OSD control pad on front panel
▪ Certification	BSMI, CCC, CE, FCC Class A, UL
▪ Dimensions (W x H x D)	482 x 399.2 x 67 mm (18.98 x 15.71 x 2.64 in)
▪ Enclosure	Front panel: Aluminum with coating Rear cover: Stainless steel chassis
▪ Mount Options	Panel, wall, desktop, VESA arm, and 19" rackmount
▪ Power Input	Phoenix Jack: 24 V _{DC} input
▪ Power Consumption	18 W + 20%
▪ Video Port	VGA & DVI-D port
▪ Weight (Net)	10.65 kg (23.46 lbs)

LCD Display

▪ Display Type	SXGA TFT LCD with LED backlight
▪ Display Size	19"
▪ Max. Resolution	1280 x 1024
▪ Max. Color	16.7M
▪ Viewing Angle (H/V °)	170/160
▪ Luminance (cd/m²)	350
▪ Backlight Life	50,000 hr
▪ Contrast Ratio	1000:1

Features

- 19" SXGA TFT LED LCD with 50K backlight lifetime
- Robust design with stainless steel chassis and aluminum front panel
- Anti-glare screen with tempered glass and IP65-certified front panel
- Lockable OSD control pad on rear cover
- Supports 24 V_{DC} power input
- Supports panel, wall, desktop, rack, or VESA arm mounting
- Supports 9U pre-drilled rackmount mounting holes

Touchscreen


▪ Driver	Penmount 6000
▪ Interface	RS-232 and USB
▪ Lifespan	35 million touches at a single point
▪ Light Transmission	> 80%
▪ OS Support	Windows XP, 2000, Vista, 7, 8/8.1, 10, XP/7/8/10 Embedded, CE, Linux
▪ Power Consumption	+5 V @ 100 mA
▪ Touch Resolution	Linearity

Environment

▪ Operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
▪ Storage Temperature	-30 ~ 80 °C (-22 ~ 176 °F)
▪ Humidity (Storage)	90% @ 50 °C non-condensing
▪ IP Rating	Front panel is IP65 compliant
▪ Vibration	5 ~ 500 Hz, 1 Grms (Operating, Random)

Dimensions

Unit: mm [inch]

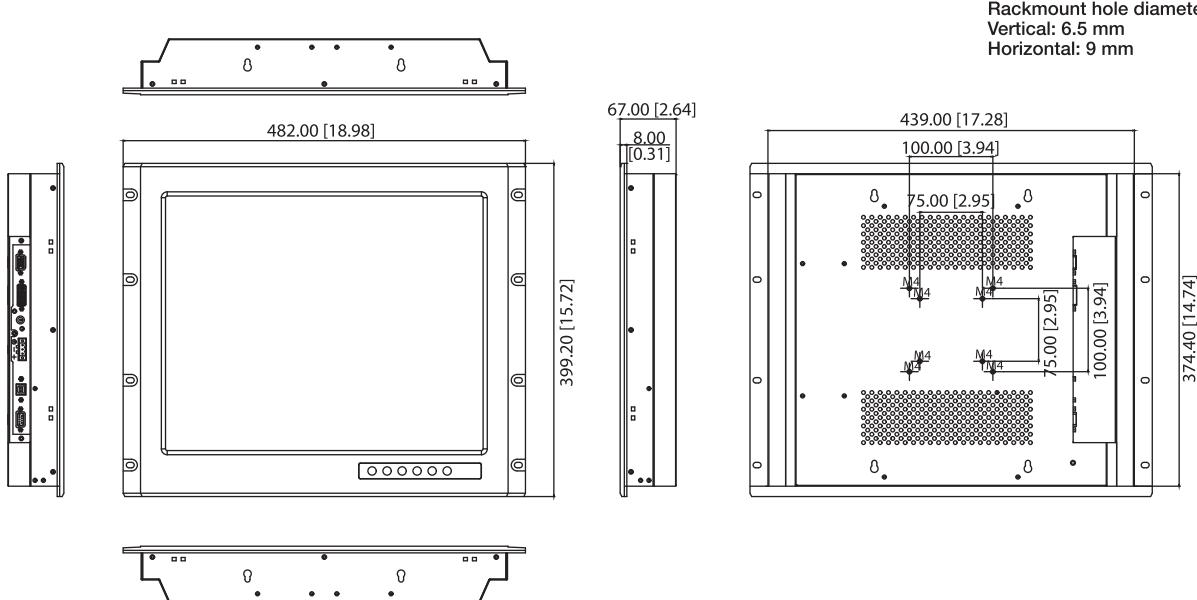

Panel Cutout Dimensions: 441 x 376.4 mm (17.36 x 14.81 in)

Ordering Information

- **FPM-3191G-R3BE** 19" SXGA Ind. Monitor w/ Resistive TS (Combo)

Optional Accessories

- **1702002600** Power Cable US Plug 1.8 M
- **1702002605** Power Cable EU Plug 1.8 M
- **1702031801** Power Cable UK Plug 1.8 M
- **1700000596-11** Power Cable China/Australia Plug 1.8 M
(Direct rack mounting, no need accessory)
- **96PSA-A60W12V1-1** Adapter 100-240V 60W 12V 5A
- **96PSA-A60W24T2** Adapter 100-240V 60W 24V 2.5A
- **FPM-3001G-ADKE** Adapter bracket for FPM-3000 15"/17"/19"

I/O View

